PALMER

An economical solution to a wide-range of applications.

Painted Steel Case Utility Gauges

Model 15PB - 1-1/2" Gauge

Model 20PB - 2" Gauge

Model 25PB - 2-1/2" Gauge

Model 40PB - 4" Gauge

FEATURES

- · Corrosion Resistant Black Painted Steel
- · Movement is low friction durable brass
- · Economical
- Low cost general purpose gauge for industrial use where high accuracy or rugged duty are not needed


Models 15PB • 20PB • 25PB • 40PB Series Specifications

Models 131 D	Zoi b Zoi b Foi b delles opecilications							
Case:	Corrosion Resistant Black Painted Steel. 1-1/2" (40mm), 2" (50mm), 2-1/2" (63mm), and 4" (100mm) diameter							
Fill:	Dry							
Window:	Acrylic. Instrument Glass on 4"							
Socket:	Brass or Phosphor Bronze							
Connection:	1/8" NPT on 1-1/2", 1/4" NPT on 2", 2-1/2" and 4" Optional 1/4" to 1/2" SS Adapter							
Bourdon Tube:	Brass or Phosphor Bronze							
Movement:	Low friction, durable Brass							
Pointer:	Painted Black Aluminum, non-adjustable							
Dial:	White Aluminum with black markings in accordance with ASME B40.1 -2005							
Accuracy:	15PB, 20PB, and 25PB: ± 2% mid-range. 40PB: ± 1.5% mid-range							
Range Availability:	PSI, Metric, and Dual Scales.							
Process Temperature Limits:	-25° to +80°C / -13° TO 176°F							







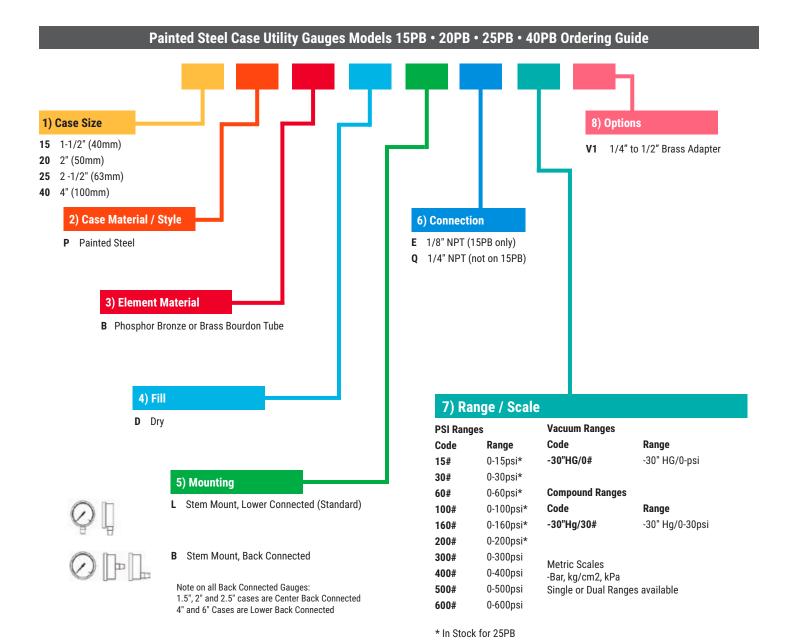

Minimum order quantities may apply.

If not in Stock, minimum order is 100 pieces PER CASE SIZE AND RANGE.

Please Note: Not all configurations are available!

Mounting style can be mixed within Case size and Range to achieve minimum.

Example of a typical pressure gauge part number configuration:

5. 5. 1												
	25	P	В		D		L	Q		60#		
	Case Size	Case Material/Style	Element Material		Fill		Mounting	Connection		Range/ Scale		Options

